


SUBMERSIBLE PUMPS AND MOTORS

PRODUCT OVERVIEW



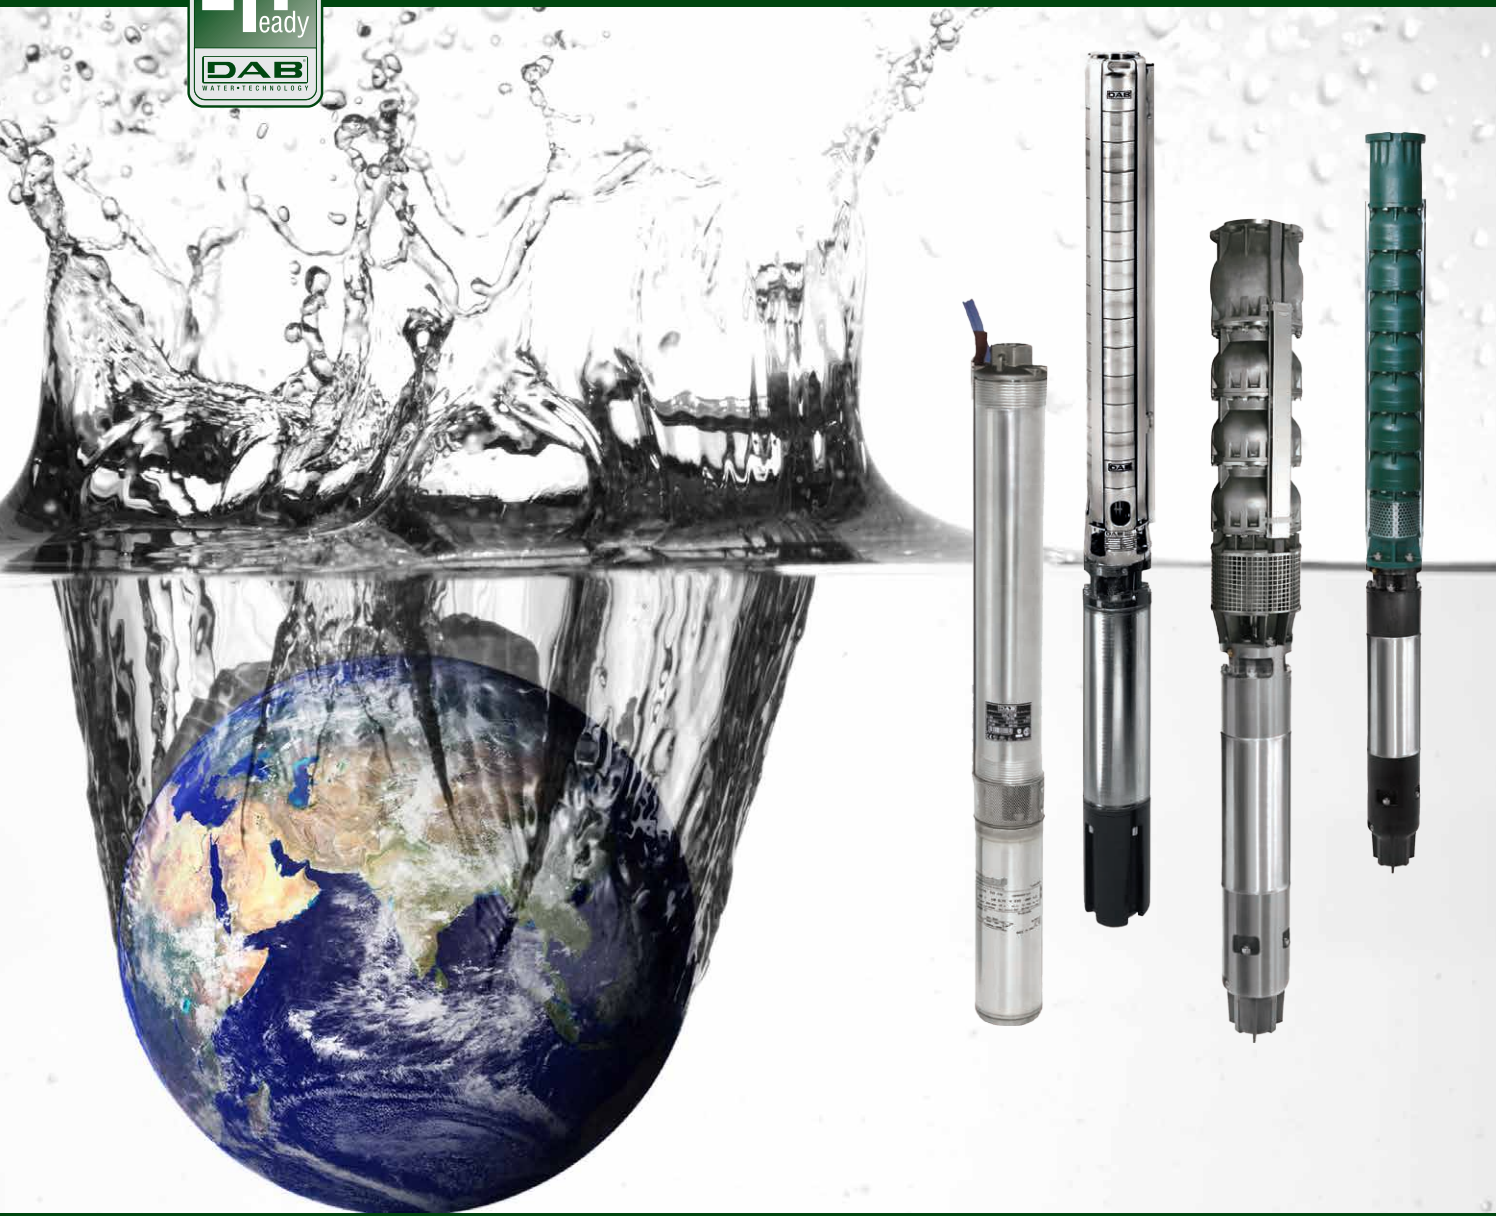

DAB AND TESLA



MESTRINO (PD)



SAN GERMANO DEI BERICI (VI)

With over 2 million units produced every year, DAB's electronic pumps are synonymous with technology and reliability.

Thanks to the merger with TESLA, a leading Italian manufacturer of submersible motors, DAB is now also the first Italian manufacturer of submersible motors with more than 180,000 units produced last year.

Joined to DAB production of a wide range of submersible pumps from 3" to 24", we are able to provide adequate solutions for every kind of application, from small domestic irrigation to the most important industrial applications and water supply.

There are also special versions of pumps for use in waters with varying degrees of aggressiveness.

The range of TESLA motors, **entirely designed and manufactured in Italy** with ISO 9001 certified processes, is able to cover all your needs and includes water encapsulated engines (4" and 6"), water cooled rewindable (up to 14) and oil filled rewindable (4").

DAB puts at your disposal a dedicated technical and commercial office, which provides product development, immediate support and flexibility, while also offering a 'high degree of customization'.



PUMPS FROM 3" TO 4" RANGE



DAB is compliance with EcoDesign Directive (ErP - Directive Energy related Products - 2009/125/CE) EC Regulation 547/2012 which provides:

FOR MULTISTAGE SUBMERSIBLE PUMPS (MSS)

4" AND 6"



- starting from 01 January 2015 $MEI \geq 0,4$





PUMPS FROM 6" TO 24" RANGE




PERFORMANCE RANGE FROM **3" TO 4"**

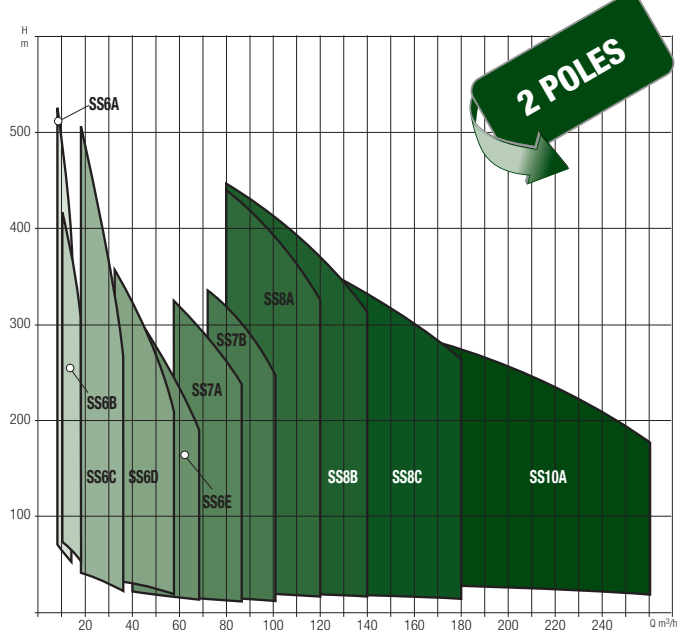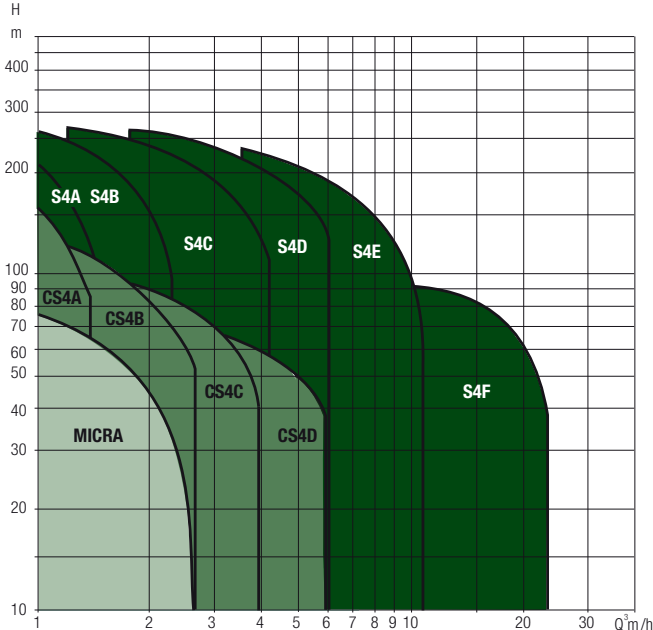PERFORMANCE RANGE FROM **6" TO 10"**

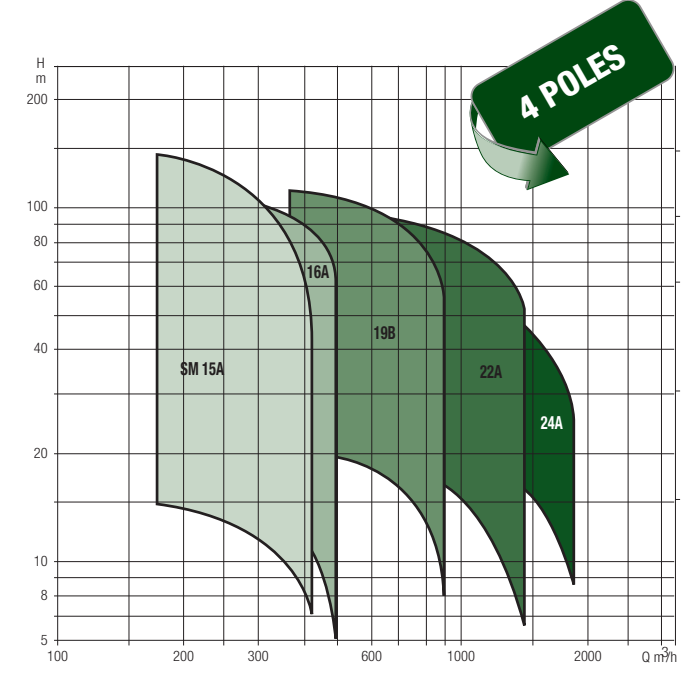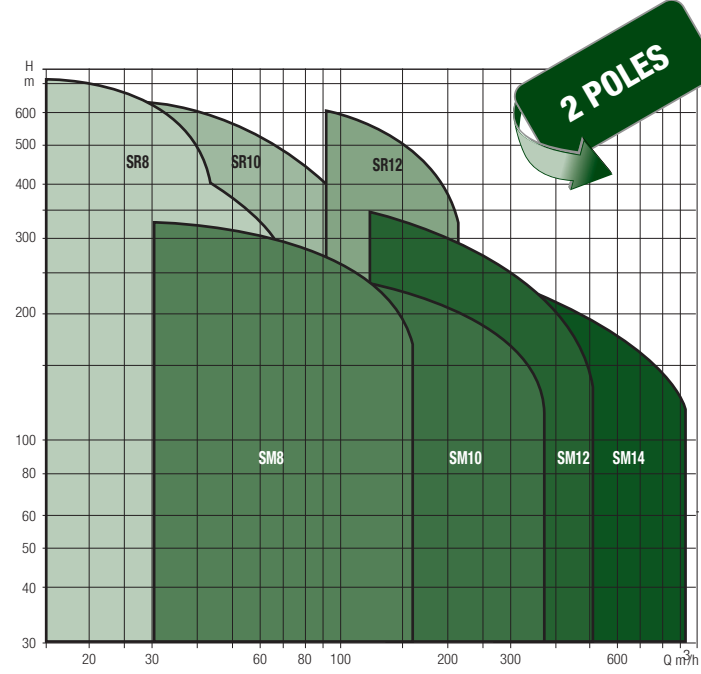

PERFORMANCE RANGE FROM **6" TO 24"**


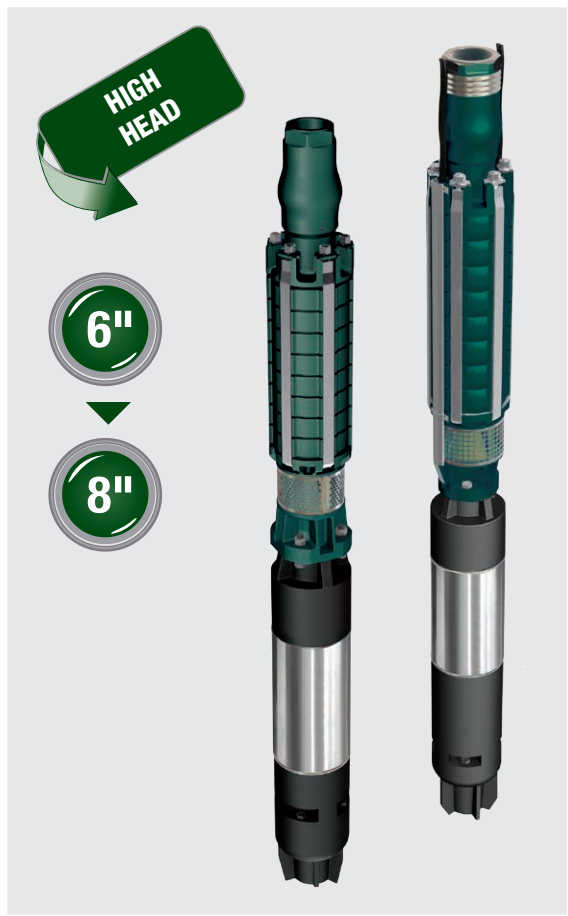


SERIES	MICRA HS - MICRA	IDEA	SUN4" WELL
SUBMERSIBLE PUMPS			
TECHNICAL DATA	<ul style="list-style-type: none"> • MAX DELIVERY MICRA HS: 5,5 m³/h MICRA: 2,5 m³/h • MAX HEAD: 90 m • MAX FREQUENCY MICRA HS: 110 Hz (6300 rpm) MICRA: 50 Hz (2900 rpm) 	<ul style="list-style-type: none"> • MAX DELIVERY : 2,4 m³/h • MAX HEAD: 90 m • POWER RANGE: 0,55 kW -1 kW / 0,75 hp - 1,5 hp 	<ul style="list-style-type: none"> • MAX DELIVERY: 9 m³/h • MAX HEAD: 110 m • POWER: 0,8 kW / 1,1 hp
FEATURES	<ul style="list-style-type: none"> • HYDRAULIC PART <ul style="list-style-type: none"> · Pump body: Stainless steel · Impellers: noryl · Diffusers: self-lubricating polyacetal · Base support and head: brass • MOTOR <ul style="list-style-type: none"> · Type: <ul style="list-style-type: none"> 3HS: high speed - canned water-filled 3GF: canned water-filled · Materials: AISI 304 Stainless steel and brass 	<ul style="list-style-type: none"> • HYDRAULIC PART <ul style="list-style-type: none"> · Pump body: Cast Iron · Impellers: brass • MOTOR <ul style="list-style-type: none"> · Type: dry-type - canned stator · Materials: AISI 304 Stainless steel 	<ul style="list-style-type: none"> • HYDRAULIC PART <ul style="list-style-type: none"> · Pump body: Stainless steel · Impellers: noryl · Diffusers: noryl · Base support and head: AISI 304 Stainless-steel • MOTOR <ul style="list-style-type: none"> · Type: <ul style="list-style-type: none"> 40L SOLAR: oil-filled permanent magnet · Materials: AISI 304 Stainless steel
EXTRA	MICRA HS PACKAGE INCLUDES THE ACTIVE DRIVER M/T 2.2 110 Hz	REMOVABLE H07RN-F POWER CABLE, LENGHT 15 M. SUPPLIED WITH 15 M OF NYLON ROPE	ON DEMAND IS AVAILABLE A COMPLETE PACKAGE FOR THE INSTALLATION WITH: HYDRAULIC PART, MOTOR, CONTROL UNIT, CAPACITIVE SENSOR, PHOTOVOLTAICS PANELS

FOR ADDITIONAL INFORMATION PLEASE CONSULT OUR TECHNICAL LITERATURE

SERIES	CS4	S4
SUBMERSIBLE PUMPS		
TECHNICAL DATA	<ul style="list-style-type: none"> • MAX DELIVERY: 6 m³/h • MAX HEAD: 230 m • POWER RANGE: 0,37 kW - 1,1 kW / 0.5 hp - 1,5 hp 	<ul style="list-style-type: none"> • MAX DELIVERY: 27 m³/h • MAX HEAD: 318 m • POWER RANGE: 0,37 kW - 5,5 kW / 0.5 hp - 7,5 hp
FEATURES	<ul style="list-style-type: none"> • HYDRAULIC PART <ul style="list-style-type: none"> · Pump body: Stainless steel · Impellers: noryl · Diffusers: noryl · Base support and head: tecnopolymer • MOTOR <ul style="list-style-type: none"> · Type: <ul style="list-style-type: none"> 4GG: canned water-filled 4OL: rewindable oil-filled · Materials: AISI 304 stainless steel 	<ul style="list-style-type: none"> • HYDRAULIC PART <ul style="list-style-type: none"> · Pump body: Stainless steel · Impellers: noryl · Diffusers: noryl · Base support and head: AISI 304 stainless steel • MOTOR <ul style="list-style-type: none"> · Type: <ul style="list-style-type: none"> 4GG: canned water-filled 4OL: rewindable oil-filled · Materials: AISI 304 stainless steel
EXTRA	<p>SUPPLIED WITH CONTROL BOX FOR THE SINGLE PHASE VERSION, 15 or 30 meters cable and security rope</p> <p>AVAILABLE VERSION WITH 4TW MOTOR WITH INTEGRATED CAPACITOR WHICH DOES NOT REQUIRE THE USE OF CONTROL BOX</p>	<p>AVAILABLE VERSION WITH 4TW MOTOR WITH INTEGRATED CAPACITOR WHICH DOES NOT REQUIRE THE USE OF CONTROL BOX</p> <p>AVAILABLE ON REQUEST CONTROL PANELS, INVERTER PANELS AND ACCESSORIES. ADDITIONAL INFORMATION ON PRICE LIST.</p>

FOR ADDITIONAL INFORMATION PLEASE CONSULT OUR TECHNICAL LITERATURE

SERIES	SS6 - SS7 - SS8 - SS10	SR6 - SR8
SUBMERSIBLE PUMPS		
TECHNICAL DATA	<ul style="list-style-type: none"> • MAX DELIVERY: 260 m³/h • MAX HEAD: 670 m • POWER RANGE: 4 kW - 190 kW 	<ul style="list-style-type: none"> • MAX DELIVERY: 80 m³/h • MAX HEAD: 770 m • POWER RANGE: 5,5 kW - 92 kW / 7,5 hp - 125 hp
FEATURES	<ul style="list-style-type: none"> • HYDRAULIC PART <ul style="list-style-type: none"> · Pump body: AISI 304 pressed steel · Impellers: AISI 304 pressed steel · Diffusers: AISI 304 pressed steel • MOTOR <ul style="list-style-type: none"> · Type: <ul style="list-style-type: none"> 6GF: canned water-filled TR6 - TR10: rewindable water-filled · Materials: AISI 304 stainless steel and cast iron 	<ul style="list-style-type: none"> • HYDRAULIC PART <ul style="list-style-type: none"> · Pump body: cast iron · Impellers: stainless steel or cast iron · Diffusers: brass • MOTOR <ul style="list-style-type: none"> · Type: <ul style="list-style-type: none"> 6GF: canned water-filled TR6-TR8: rewindable water-filled · Materials: AISI 304 stainless steel and cast iron
EXTRA	DIFFERENT VOLTAGE AVAILABLE ON REQUEST AND SPECIAL MATERIALS (AISI 316) FOR APPLICATION IN AGGRESSIVE WATER	DIFFERENT VOLTAGE AVAILABLE ON REQUEST AND SPECIAL MATERIALS FOR APPLICATION IN AGGRESSIVE WATER

FOR ADDITIONAL INFORMATION PLEASE CONSULT OUR TECHNICAL LITERATURE

SERIES	SM6 - SM14	SM15 - SM24
SUBMERSIBLE PUMPS		
TECHNICAL DATA	<ul style="list-style-type: none"> • MAX DELIVERY: 900 m³/h • MAX HEAD: 400 m • POWER RANGE: 5,5 kW - 400 kW / 7,5 hp - 550 hp 	<ul style="list-style-type: none"> • MAX DELIVERY: 1800 m³/h • MAX HEAD: 150 m • POWER RANGE: 18,5 kW - 300 kW / 20 hp - 400 hp
FEATURES	<ul style="list-style-type: none"> • HYDRAULIC PART <ul style="list-style-type: none"> · Pump body: cast iron, AISI 316 stainless steel or duplex · Impellers: cast iron, AISI 316 stainless steel or brass • MOTOR <ul style="list-style-type: none"> · Type: <ul style="list-style-type: none"> 6GF: canned water-filled TR6-TR14: rewindable water-filled · Materials: AISI 304 stainless steel and cast iron 	<ul style="list-style-type: none"> • HYDRAULIC PART <ul style="list-style-type: none"> · Pump body: cast iron · Impellers: brass • 4 POLES MOTOR <ul style="list-style-type: none"> · Type: <ul style="list-style-type: none"> TR8-TR14: rewindable water-filled · Materials: AISI 304 stainless steel and cast iron
EXTRA	DIFFERENT VOLTAGE AVAILABLE ON REQUEST AND SPECIAL MATERIAL (AISI 316 - DUPLEX) FOR APPLICATION IN AGGRESSIVE WATER	DIFFERENT VOLTAGE AVAILABLE ON REQUEST AND SPECIAL MATERIALS FOR APPLICATION IN AGGRESSIVE WATER

FOR ADDITIONAL INFORMATION PLEASE CONSULT OUR TECHNICAL LITERATURE



Tesla is the Brand leader for the submersible motors from 3" to 14".

Since its foundation in 1990 Tesla developed a wide experience in design and production of the widest range of motors in the market.

In the last four years its mission has been the continuous research of the highest level in quality and service and the increase of the products range, which now includes also rewindable motors from 6" to 14".



MOTORS FROM 3" TO 14" RANGE



100% MADE IN ITALY

SERIES

3GF - 3GS - 3HS

4GG - 4GX - 4TW - 4OL



TECHNICAL DATA

- **POWER RANGE**
 SINGLEPHASE: 0,37 kW - 0,75 kW / 0.5 hp - 1 hp
 THREEPHASE: 0,37 kW - 0,75 kW / 0.5 hp - 1 hp

- **POWER RANGE**
 4GG - 4GX - 4OL SINGLEPHASE:
 0,37 kW - 3,7 kW / 0.5 hp - 5 hp
 4GG - 4GX - 4OL THREEPHASE:
 0,37 kW - 7,5 kW / 0.5 hp - 10 hp
 4TW SINGLEPHASE:
 0,37 kW - 1,1 kW / 0.5 hp - 1,5 hp

FEATURES

- **TYPE**
 3GF: canned water-filled
 3GS: canned water-filled
 3HS: high-speed (6300 rpm) canned water-filled

- **TYPE**
 4GG: canned water-filled
 4GX: canned water-filled (AISI316)
 4TW: canned water-filled (capacitor included)
 4OL: rewindable oil-filled

- **MATERIALS**
 3GF: AISI 304 stainless steel and brass
 3GS: AISI 304 stainless steel
 3HS: AISI 304 stainless steel and brass

- **MATERIALS**
 4GG: AISI 304 stainless steel
 4GX: AISI 316 stainless steel
 4TW: AISI 304 stainless steel and noryl (capacitor cartridge)
 4OL: AISI 304 stainless steel

EXTRA

DIFFERENT VOLTAGE AVAILABLE ON REQUEST

DIFFERENT VOLTAGE AVAILABLE ON REQUEST

FOR ADDITIONAL INFORMATION PLEASE CONSULT OUR TECHNICAL LITERATURE

SERIES	6GF - 6GX	TR6-TR8 - TR10 - TR12 - TR14
	 	 
TECHNICAL DATA	<ul style="list-style-type: none"> POWER RANGE 6GF - 6GX - THREEPHASE: 4 kW - 37 kW / 5.5 hp - 50 hp 	<ul style="list-style-type: none"> POWER RANGE TR6 THREEPHASE: 5,5 kW - 45 kW / 7,5 hp - 50 hp TR8 THREEPHASE: 30 kW - 110 kW / 40 hp - 150 hp TR10 THREEPHASE: 75 kW - 190 kW / 100 hp - 250 hp TR12 THREEPHASE: 132 kW - 300 kW / 180 hp - 340 hp TR14 THREEPHASE : 220 kW - 400 kW / 300 hp - 550 hp
FEATURES	<ul style="list-style-type: none"> TYPE canned water-filled MATERIALS 6GF: AISI 304 stainless steel and cast iron 6GX: AISI 316 stainless steel 	<ul style="list-style-type: none"> TYPE rewindable water-filled MATERIALS STANDARD VERSIONS: AISI 304 stainless steel and cast iron SPECIAL VERSION: AISI 316 /904 stainless steel AVAILABLE ON REQUEST A PE2 + PA WINDING VERSION FOR INVERTER APPLICATION
EXTRA	DIFFERENT VOLTAGE AVAILABLE ON REQUEST	AVAILABLE FULL RANGE OF 4 POLES REWINDABLE WATER-FILLED MOTORS

FOR ADDITIONAL INFORMATION PLEASE CONSULT OUR TECHNICAL LITERATURE





DAB PUMPS LTD.
Unit 4 and 5, Stortford Hall Industrial Park,
Dunmow Road,
Bishops Stortford,
Herts
CM23 5GZ - UK
salesuk@dwgroup.com
Tel. +44 1279 652 776
Fax +44 1279 657 727



DAB PUMPS B.V.
Brusselstraat 150
B-1702 Groot-Bijgaarden - Belgium
info.belgium@dwgroup.com
Tel. +32 2 4668353
Fax +32 2 4669218



DAB PUMPS B.V.
Albert Einsteinweg, 4
5151 DL Drunen - Nederland
info.netherlands@dwgroup.com
Tel. +31 416 387280
Fax +31 416 387299



DAB PUMPEN DEUTSCHLAND GmbH
Tackweg 11
D - 47918 Tönisvorst - Germany
info.germany@dwgroup.com
Tel. +49 2151 82136-0
Fax +49 2151 82136-36



DAB PUMPS IBERICA S.L.
Avenida de Castilla nr.1 Local 14
28830 - San Fernando De Henares - Madrid
Spain
info.spain@dwgroup.com
Tel. +34 91 6569545
Fax: +34 91 6569676



DAB PRODUCTION HUNGARY KFT.
H-8800
Nagykanizsa, Buda Ernő u.5
Hungary
Tel. +36 93501700



DAB PUMPS POLAND Sp. z o.o.
Mokotów Marynarska
ul. Postępu 15C
02-676 Warszawa - Poland
polska@dabpumps.com.pl
Tel. +48 223 816 085



DAB UKRAINE Representative Office
Regus Horizon Park
4 M. Hrinchenka St, suit 147
03680 Kiev - Ukraine
Tel. +38 044 391 59 43



OOO DAB PUMPS
Novgorodskaya str. 1, block G
office 308, 127247, Moscow - Russia
info.russia@dwgroup.com
Tel. +7 495 122 0035
Fax +7 495 122 0036



DAB PUMPS INC.
3226 Benchmark Drive
Ladson, SC 29456 - USA
info.usa@dwgroup.com
Tel. 1-843-824-6332
Toll Free 1-866-896-4DAB (4322)
Fax 1-843-797-3366



DWT SOUTH AFRICA
Podium at Menlyn,
3rd Floor, Unit 3001b, 43 Ingersol Road,
C/O Lois and Atterbury street,
Menlyn, Pretoria, 0181 - South-Africa
info.sa@dwgroup.com
Tel. +27 12 361 3997
Fax +27 12 361 3137



DAB PUMPS CHINA
No.40 Kaituo Road, Qingdao Economic & Technological
Development Zone
Qingdao City, Shandong Province - China
PC: 266500
info.china@dwgroup.com
Tel. +8653286812030-6270
Fax +8653286812210



DAB PUMPS DE MÉXICO, S.A. DE C.V.
Av Gral Álvaro Obregón 270, oficina 355
Hipódromo, Cuauhtémoc 06100
México, D.F.
Tel. +52 55 6719 0493